

# UVSat and other polish satellite missions

Piotr Orleanski<sup>1</sup>, Jacek Kosiec<sup>2</sup>, Marek J. Sarna<sup>3</sup> and Roman Wawrzaszek<sup>1</sup>

1. Space Research Center, Polish Academy of Sciences  
Bartycka 18a, 00-716 Warszawa, Poland
2. Creotech Instruments S.A., Okulickiego 7/9, 05-077 Piaseczno
3. Nicolaus Copernicus Astronomical Center, Polish Academy of Sciences  
Bartycka 18, 00-716 Warszawa, Poland

We briefly present concepts of the several space missions in which Polish team participate.

## 1 Introduction

In this preliminary overview, we selected the basic satellite missions in which Polish teams participate. The idea of the selection is to show the natural continuation from the the most current projects (already signed and covered by contracts) to the proposal of the Polish National Science Satellite - UV-Sat. So, the selection starts from the CaSSIS, ASIM, MERTIS and STIX (power, optoelectronics and processing units for instruments already delivered to ESA missions), goes through AIS-Sat and Hypersat (the examples of on-going contracta for Polish small satellite platforms) and ends on the diuscussion on the UV-Sat (based on the Feasibility Study already finished for this mission).

## 2 ExoMars

The 2016 ExoMars Trace Gas Orbiter (TGO) is the first in a series of Mars missions to be undertaken jointly by the two space agencies, European Space Agency (ESA) and Roscosmos. A key goal of this mission is to gain a better understanding of methane and other atmospheric gases that are present in small concentrations (less than 1% of the atmosphere) but nevertheless could be evidence for possible biological or geological activity. One of the instruments of TGO is Colour and Stereo Surface Imaging System (CaSSIS). A high resolution camera (5 metres per pixel) capable of obtaining colour and stereo images over a wide swath. CaSSIS will provide the geological and dynamical context for sources or sinks of trace gases detected by two other instruments: NOMAD and ACS. Poland SRC PAS is responsible for delivery of CaSSIS Power Supply Unit.

## 3 BepiColombo

BepiColombo is ESA's mission to Mercury. Among the terrestrial planets, Mercury plays a special role. It is the smallest planet, the densest, the one with the probably oldest surface heavily gardened by space weathering, and shows large daily

surface temperature variations. Understanding Mercury is crucial to develop a better understanding of the early processes in the inner solar system, of how our Earth formed, how it evolved, and how it interacts with the Sun. SRC PAS is involved in the Mercury Radiometer and Thermal Infrared Spectrometer (MPO-MERTIS). The scientific goal of MERTIS is to provide detailed information about the mineralogical composition of Mercury's surface layer by measuring the spectral emittance in the spectral range from 7-14  $\mu\text{m}$  with a high spatial and spectral resolution. The general instrument architecture comprises two separate parts - the Sensor Head including optics, detector and proximity electronics and the Electronics Unit containing sensor control and driving electronics as well as power supply. This highly integrated measurement system is completed by a Pointing device which orients the optical path to the planet and the calibration targets. The SRC PAS is responsible for designing and manufacturing of the electro-optical subsystem called: MPO-Pointing Unit, which is a part of the spectrometer.

#### **4 Mission for the International Space Station – ISS**

The Atmosphere-Space Interactions Monitor (ASIM) aboard ISS is proposed for studying the high-altitude, thunderstorm-related optical emission from the stratosphere and mesosphere (Neuber et al., 2009). One of the two main instruments in ASIM is the Miniature-X and Gamma-ray Sensor (MXGS) designed by the University of Bergen and University of Valencia in cooperation with SRC PAS in Warsaw. The SRC PAS is responsible for designing and manufacturing the Power Supply Unit and its autonomous Housekeeping System.

#### **5 Solar Orbiter – SOLO**

The Solar Orbiter (SOLO) will be launched by ESA in 2018 to perform observations of the Sun, the inner heliosphere and solar wind (Skup et al., 2012; Meuris et al., 2012; Krucker et al., 2016). SOLO will fly towards the Sun and will approach the star closer than any other previously launched spacecraft. One of the SOLO instruments is an X-ray spectrometer/telescope (STIX) which is going to provide imaging spectroscopy of solar X-ray emission in a wide energy range. The Spectrometer Telescope for Imaging X rays (STIX) provides imaging spectroscopy of solar thermal and non-thermal X-ray emissions from 4 to 150 keV, with unprecedented sensitivity and spatial and spectral resolution. STIX plays an important role in enabling Solar Orbiter to achieve two of its major science goals: (1) determining the magnetic connection of Solar Orbiter back to the Sun and (2) understanding the acceleration of electrons at the Sun and their transport into interplanetary space. The remote-sensing X-ray measurements made with STIX will determine the intensity, spectrum, timing, and location of accelerated electrons near the Sun. Flare-accelerated electrons escaping the Sun can then be tracked into the inner heliosphere through their type-III radio emission, observed and detected to provide direct tracing of the magnetic structure, field line length, and connectivity. The Polish team from the SRC PAS is involved in the development of STIX electronics: IDPU (Instrument Data Processing Unit) and Aspect System, thermal modelling and EGSE (Electronic Ground Support Equipment).

## 6 The Polish Satellite for the Automatic Identification System – SAT-AIS-PL

The main objective of the SAT-AIS-PL mission is detection of Automatic Identification System (AIS) messages generated by vessels and providing this data to a data centre localized in Poland (Walczak et al., 2015). Having its origins in late 90's AIS system has been designed de facto as a navigation aid. Nowadays, it is becoming one of the basic tools for ship traffic monitoring and e-navigation, while still providing the navigational information to the ship Master. Continuous evolution of the AIS widely described in available scientific materials and ITU's documents led to increased situational awareness on open waters. AIS provides a continuous, automatic and autonomous information exchange in both relations: ship-to-ship as well as ship-to-shore. It is expected that SAT-AIS-PL satellite will be equipped with a new standard VDES (VHF Data Exchange System) which is currently under the standard preparation process coordinated by ITU. VDES is a future version of AIS which does not suffer from messages' collisions. Moreover, VDES actively includes space component in its frame, considering satellites ready for VDES as an important part of the standard. In a frame of SAT-AIS-PL Pre-Feasibility Study it has been identified that Polish governmental authorities are interested in obtaining, archiving and use of data related to vessels traffic and routes. According to that AIS data as also other data related to detection, positioning and identification of maritime traffic members is in a scope of interested of proposed satellite payload.

## 7 HyperSat – new open source microsatellite platform

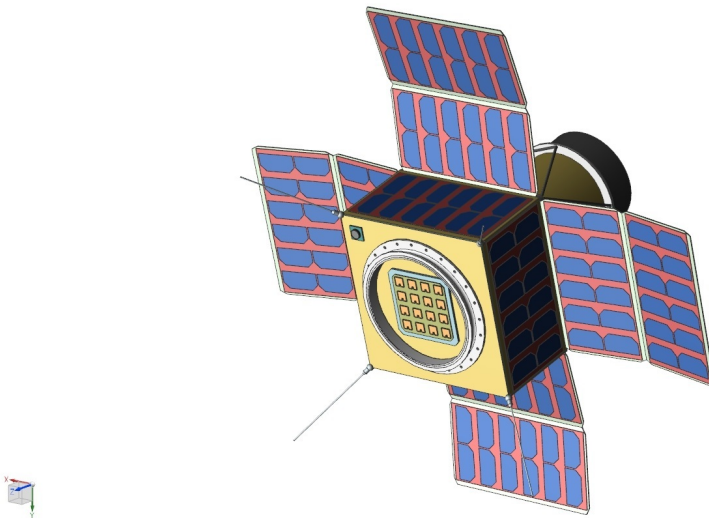


Fig. 1: Illustration of the HyperSat – new open source microsatellite platform

HyperSat is a universal satellite bus designed for space missions realized in short time and at a low cost. It can support missions of a single satellite or constellations of spacecraft. The bus comprises exchangeable modules which offer different

functionalities. The smallest bus configuration measures 30x30x10 cm and has a mass of 10 kg. It can be extended to reach 30x30x60 cm and a mass of 60 kg by adding additional modules or instruments. Currently the Hypersat bus prototype is being developed. Electronics design will cover all subsystems (among them power, on-board computer and communications). Major advantages of a new bus will be provided by its modularity and repeatability. Customers will be able to configure the satellite using readily available modules. HyperSat is defined similarly as a smaller Cubesat (10x10x10 cm, 1 kg), but will be able to carry bigger instruments, so its usefulness will be obvious. The bus will be compatible with majority of devices designed for Cubesats. That will make a significant number of components available to potential customers. A standard separation system and known bus dimensions will ease launch logistics and help in securing faster delivery times to orbit. The Hypersat bus is being developed as an open system: a description of its structure and drawings, as well as electronics schematics like Hypesat Data Bus will be available under open license. The Hyper Bus Development project will be carried out by Creotech Instruments S.A. together with partners like Space Research Centre PAS and Warsaw University of Technology.

## 8 Polish Ultraviolet Satellite - UVSat

Ultraviolet (UV) is the spectral range in which hot object emit most of their energy. This spectral region is therefore crucial for understanding young and massive objects like OB stars, Wolf-Rayet stars or Luminous Blue Variables, but also for objects at the final stages of their stellar evolution (white dwarfs, hot subdwarfs). Many non-stellar objects, like AGNs, including quasars and blazars, also emit a significant fraction of their energy in UV. The present-day possibilities of carrying out UV observations are confined to several UV space missions or dedicated experiments on-board X-ray satellites. These are: Swift with its 30-cm UVOT telescope, Optical Monitor aboard XMM-Newton, GALEX with 50-cm Ritchey-Chretien telescope (Siegmond et al., 2004; Morrissey et al., 2007) and ASTROSAT mission carrying twin 37.5-cm UVIT telescopes (Kumar et al., 2012). Several instruments on-board HST (System Design Report, 1976) have also the capability of doing UV spectroscopy and photometry. The proposed UVSat mission will have the added advantage of being able to do simultaneous spectroscopy and photometric imaging with high time resolution, a capability which hitherto has not been exploited very much (Studium, 2016; Pigulski et al., 2017). It is this potential which makes UVSat particularly interesting, as well as exploiting new technologies which make such a mission more effective and on a more compact platform than previous UV space observatories. In all cases, UV spectroscopy simultaneous with photometry greatly increases the scientific yield. None of the working or planned for the next decade UV missions has a similar ability. With this satellite, we will therefore fill an important observational niche in the study of the variability of hot objects. It can be also complementary to the other large planned UV mission like UVMag/Arago (Neiner C., 2015) or WSO-UV (Boyarchuk et al., 2016))

However, existing UV spectroscopic instruments in space (e.g. HST, ASTROSAT) have a limited amount of life left, at most a few years, and ARAGO will not fly before 2030 at the earliest. Therefore, there is a great need for some UV spectroscopic capability in the 2020's, at a time when vast numbers of objects needing UV spectroscopy

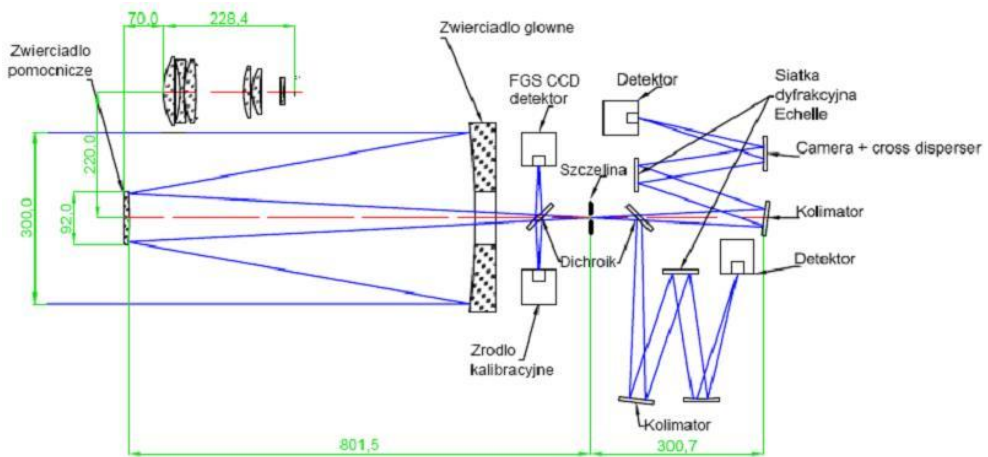


Fig. 2: Generic simultaneous spectroscopic and photometric scheme

will be discovered by new ground-based systems such as well as space-based wide-field systems. The basic technical concept of the wide-field long-term high-cadence UV photometry was discussed and presented by (Pigulski et al., 2017). We would like to present the concept of simultaneous photometry and spectroscopy mission from space namely UVSat. UVSat offers the possibility of a unique capability: being able to simultaneously perform UV photometry over a wide field (10 x 10 degrees), Visible light photometry over a smaller field (0.5 x 0.5 degrees) and FUV or NUV, high resolution or low resolution spectroscopy of the star in the centre of the field.

### Telescope Aperture and Optics

While the size of UV-Sat will not be great, experience has shown that space-based instruments of even modest size can contribute vital science. The example of IUE for spectroscopy (aperture 45cm) and for photometry CoRoT (27 cm), GALEX (50 cm) and MOST (15 cm) are most applicable. For the baseline UVSat concept, we choose an aperture of 30 cm for the spectroscopic telescope and an appropriate aperture of 3-10 cm for the photometric telescope.

A standard two-mirror reflector providing a 0.5 degree field of view (or larger if possible) would be best (e.g. Ritchey-Chretien, but this will be studied further). Fig. 2 show baseline design schem for simultaneously photometry and spectroscopy.

### Technical details

The basic concept of the UVSat photometric mode can be defined as follows:

- The satellite will host two refracting telescopes, one with optics designed to wide-band UV observations (200 – 300 nm), the other, for observations in the visual band (500 – 600 nm).
- The field of view of both telescopes will be the same and of the order of  $10^{\circ} \times 10^{\circ}$ .
- The observations will be carried out in selected fields and will last one to six months. In each field, a sample of a few hundred objects will be monitored with a cadence of the order of a few seconds or longer.

The basic concept of the UVSat spectroscopic mode can be defined as follows:

- We assume a slit width corresponding to  $1.0''$  on the sky, therefore, the spacecraft will need to guide within  $1''$  or better to keep the star image on the slit.
- The choice of wavelength regions to study: i) FUV: 115 – 160 or 200 nm and ii) NUV: 160 or 200 – 320 nm.
- The high resolution side would be satisfied at  $R = 30,000$ , corresponding to a velocity width of 10 km/s, although some interest has been expressed in going as high as  $R = 60,000$  (5 km/s) for cometary studies. This means that an Echelle configuration is needed.

The UVSat project will be carried out by NCAC PAS together with partners like Space Research Centre PAS, Creotech Instruments S.A., University of Toronto and Astronomical Institut of the Wroclaw University.

*Acknowledgements.* The scientific and technical rationale for HyperSat and UVSat was prepared as a part of feasibility study funded by the Polish Space Agency (POLSA) and The National Center for Research and Development (NCBiR)

## References

- Astronomiczny Satelita Obserwacyjny w paśmie UV*, wstępne stadium wykonalności dla satelity UVSat, Polska Agencja Kosmiczna (2016)
- Boyarchuk, A. A., et al., *Scientific problems addressed by the Spektr-UV space project (World Spce Observatory-Ultraviolet)*, *Astronomy Reports* **60**, 1 (2016)
- Krucker, S., et al., *The Spectrometer/Telescope for Imaging X-rays on Solar Orbiter: Flight design, challenges and trade-offs*, in Nuclear Instruments and Methods in Physics Research A, pp626–629, (2016)
- Kumar, A., et al., *Ultra Violet Imaging Telescope (UVIT) on ASTROSAT*, in Tadayuki Takahashi, Stephen S. Murray, Jan-Willem A. den Herder (eds) Space Telescopes and Instrumentation 2012: Ultraviolet to Gamma Ray, Proceedings of SPIE **8443**, 84431N (2012)
- Meuris, A., et al., *Caliste-SO X-ray micro-camera for the STIX instrument on-board Solar Orbiter space mission*, in Nuclear Instruments and Methods in Physics Research A, pp288–292 (2012)
- Morrissey, P., et al., *The Calibration and Data Products of GALEX*, *ApJS* **173**, 682 (2007)
- Neiner, C., *The UVMag space project: UV and visible spectropolarimetry of massive stars*, in G. Meynet, C. Georgy, J. Groh, P. Stee (eds.) IAU Symposium, *IAU Symposium*, volume **307**, 389 (2015)
- Neubert, T., Crosby, B., Huang, T-Y., Rycroft, M.J., *ASIM - an Instrument Suite for the International Space Station*, in AIP Conference Proceedings: Coupling of Thunderstorms and Lightning Discharges to Near-Earth Space, American Institute of Physics, *AIP Conference Proceedings Series*, volume **1118**, 8 (2009)
- Pigulski, A., et al., *UVSat: a concept of ultraviolet/optical photometric satellite*, in K. Zwintz, E. Poretti(eds) , Second BRITE-Constellation Conference: Small satellite - big science, Proceedings of the PAS volume **5**, 76 (2017)
- Siegmund, O., et al., *The GALEX Mission and detectors, UV and Gamma-Ray Space Telescope Systems*, in Gunther Hasinger, Martin J. L. Turner, Proceedings of SPIE **5488**, 0277-786X/04 (2004)
- Skup, K. R., et al., *Instrument data processing unit for spectrometer/telescope for imaging x-rays (STIX)*, Proceedings of SPIE **8454**, 84540K (2012)

*System Design Report for the International Ultraviolet Explorer*, NASA Goddard Spaceflight Center, volume 1 (1976)

Walczak, M., et al., *Preliminary System Requirements Specification*, SAT-AIS-PL Phase A, internal document (2015)